

FINELINEN™

SPECIALTY THERMAL OVERLAMINATE FILM

LuxeFilms® FineLinen™ overlaminate offers allure and tactile dimension to the print, publishing and packaging world. Manufactured with a unique emboss pattern on the film, **FineLinen™** simulates the texture of high-quality European linen. The tight grain pattern gives a suave and luxurious Old World feel on every application.

KEY BENEFITS

- Superb Color Tonality and Clarity
- Grain Pattern Adds Rich Dimension
- Scuff Resistant Matte Finish
- Accepts Spot UV; Glueable and Stampable
- Total Satisfaction Gold Seal Guarantee™

SUGGESTED USES


- Business Cards and Presentation Pieces
- Cosmetic and Jewelry Packaging
- Electronics Packaging
- Three Ring and Media/Binders and Slip Cases
- Liquor and Luxury Product Packaging
- Soft and Hardbound Book Covers



Properties	Side	Value	Units	Test Method / Standard
Thickness		1	Mil	LuxeFilms® - Method
		26	Microns	
Transparency		91.2	%	ASTM D 1003
Haze		72.5	%	ASTM D 1003
Gloss		11	%	LuxeFilms® - Method
Dyne Level		38 - 40	Dyne	LuxeFilms® - Method
Coefficient of Friction	B	0.46		DIN EN ISO 8295
Application Temperature	A	220-240°F (105-115°C)	°F (°C)	Various Equipment - Always Test
Lamination Tensile Strength	MD	90.6	N/mm ²	ASTM D 882
	TD	214	N/mm ²	

A = Adhesive Side B = BOPP Side MD = Main Direction TD = Transverse Direction

Note: The information given on this specification sheet is believed to be true and accurate and is not intended to violate any statutory condition or right of a third party. Nobelus™ makes no warranty, express or implied, as to the fitness of the products for any specific use or purpose. The above data is purely for reader's consideration, investigation and verification.

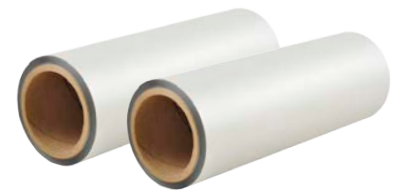

Enhancing People, Partners
and the World's Brands